
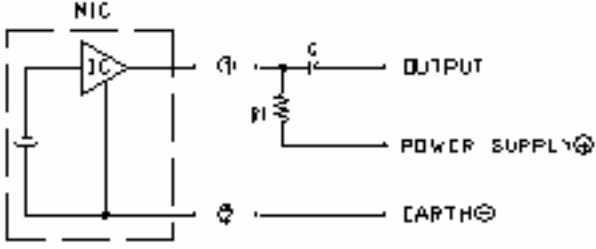
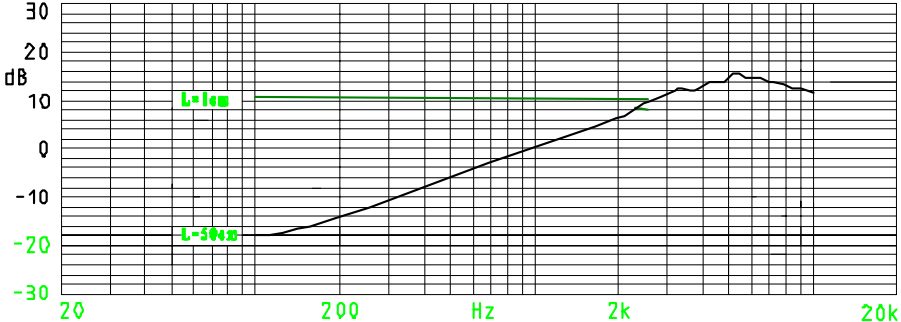


SPECIFICATION

FOR P /N MWF-6027-714-BX

1.	Scope	This specification applies electret condenser microphone(E.C.M)
2.	Model No.	MWF-6027-714-BX
3.	Operation Condition	
	3.1Temperature	-20~+50℃
	3.2Rel. Humidity	35%~85%RH
	3.3Pressure	86~106kPa
	3.4Environmental Noise	-----
	3.5Operation Voltage	+1~+10VDC
	3.6Earth	⊖
4.	Electrical Characteristics	
	4.1Standard Operation Voltage	+2VDC
	4.2Impedance	2.2k Ω (Maximum)
	4.3Current Consumption	0.5mA(Maximum)
	4.4Sensitivity	(0dB=1V/0.1Pa,1KHz) -71 ± 4.5dB
	4.5Directivity	Bi Directional (Noise Cancelling)
	4.6S/N Ratio	40dB(Minimum)(A-Curve at 1KHz,0.1Pa)
	4.7Schematic Diagram	
		
	C=1 μ F R1=2.2K ω	
	4.8Test Temperature	20℃±2℃
	Test Rel. Humidity	45%~65%RH

4.9 Frequency Response	
	
5. Mechanical Characteristics	
5.1 Dimension	$\phi 6.0 \times 2.7$
5.2 Mass	$\leq 0.5g$
5.3 Dimensional Drawing	
	
6 Reliability Tests	
The sensitivity to be within $\pm 3dB$ of initial sensitivity after 3 hours of conditioning at 20°C.	
6.1 Vibration	<p>Frequency 1 10Hz~55Hz Amplitude $\pm 0.15mm$ Frequency 2 55Hz~150Hz Acceleration $20m/s^2$</p> <p>Change of Frequency 1 octave/min 2 hrs in each of 3 axes</p>
6.2 Shocks	<p>Pulse Shape Half Sinusoidal Pulse Duration 11ms Acceleration $150m/s^2$ Number of Jolts 10 in each of 3 axes</p>
6.3 Dry Heat/Cold	70°C for 72 hrs -20°C for 72 hrs

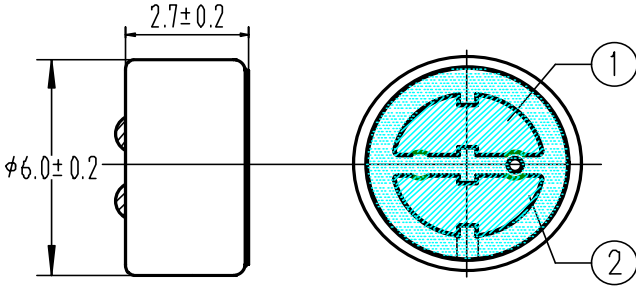

	6.4Damp Heat	90%RH,+40°C for 120 hrs
	6.5Temperature Cycles	(2h) (1h) (2h) (1h) (2h) 10cycles
7.	Cautions	
	7.1The soldering copper of a smaller type of less than 20Wshall be applied.	
	7.2The temperature of the working surface of the soldering copper shall be below 270°C.	
	7.3E.C.M shall be soldered fixed on the metal block (heat sink) which has the higher radiation effects.Said heat sink shall contact with each of E.C.M.	
	7.4The soldering time for each terminal shall be 1~2 sec.	
	7.5The pin hole soldering shall be avoided.	
	7.6E.C.M may easily destroyed by the static electricity, and the countermeasure for eliminating the static electricity (the ground for soldering copper, for worktable and for human body) shall be executed.	