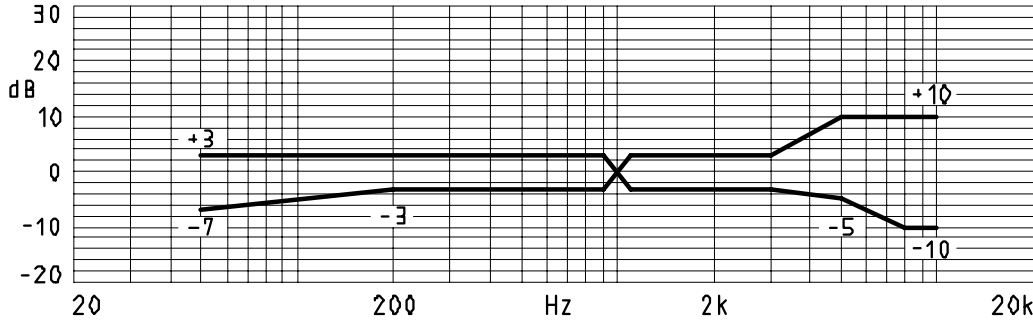


## SPECIFICATION FOR P/N MWF-6015-OX-N (General)

1.	Scope	This specification applies electret condenser microphone(E.C.M)
2.	Model No.	MWF-6015-OX-N(General)
3.	Operation Condition	
	3.1 Temperature	-20~+70℃
	3.2 Rel. Humidity	35%~85%RH
	3.3 Pressure	86~106KPa
	3.4 Environmental Noise	36dB(Maximum)
	3.5 Operation Voltage	+1~+10VDC
	3.6 Earth	⊖
4.	Electrical Characteristics	
	4.1 Standard Operation Voltage	+2.0VDC
	4.2 Impedance	2.2kΩ (Maximum)
	4.3 Current Consumption	0.5mA(Maximum)
	4.4 Sensitivity	(0dB=1V/0.1Pa,1KHz) -62±2dB
	4.5 Directivity	Omni-directional
	4.6 S/N Ratio	40dB(Minimum)(A-Curve at 1KHz,0.1Pa)
	4.7 Test Temperature	20℃±2℃
	Test Rel. Humidity	45%~65%RH
	4.8 测试电路图 Schematic Diagram	<p style="text-align: center;">C=1 μ F R1=2.2kΩ</p>

<p>4.9 频率响应曲线 Frequency Response</p> 	
<p>5. Mechanical Characteristics</p>	
5.1 尺寸 Dimension	φ6.0×1.5
5.2 重量 Mass	≤0.5g
<p>5.3 外形图 Dimensional Drawing</p>	
<p>6. Reliability Tests</p> <p>The sensitivity to be within ±3dB of initial sensitivity after 3 hours of conditioning at 20°C.</p>	
6.1 Vibration	<p>Frequency 1            10Hz~55Hz Amplitude                ±0.15mm Frequency 2            55Hz~150Hz Acceleration            20m/s<sup>2</sup> Change of Frequency 1octave/min 2 hrs in each of 3 axes</p>

6.2 Shocks	Pulse Shape	Half Sinusoidal
	Pulse Duration	11ms
	Acceleration	150m/s <sup>2</sup>
	Number of Jolts	10 in each of 3 axes
	6.3 Dry Heat/Cold	70°C for 72 hrs
6.4 Damp Heat	90%RH,+40°C for 120 hrs	
6.5 Temperature Cycles	-20°C ↔ 25°C ↔ 70°C (2h) (1h) (2h) (1h) (2h) 10cycles	
7.	Cautions	
	7.1 The soldering copper of a smaller type of less than 20W shall be applied.	
	7.2 The temperature of the working surface of the soldering copper shall be below 270°C.	
	7.3 E.C.M shall be soldered fixed on the metal block (heat sink) which has the higher radiation effects. Said heat sink shall contact with each of E.C.M.	
	7.4 The soldering time for each terminal shall be 1~2 sec.	
	7.5 The pin hole soldering shall be avoided.	
	7.6 E.C.M may easily destroyed by the static electricity, and the countermeasure for eliminating the static electricity (the ground for soldering copper, for worktable and for human body) shall be executed.	

WRTN	CHKD	APVD	DESCRIPTION